

Pro Series C

The essential choice for interactive excellence

The Pro Series C is an EDLA-certified touchscreen display built for seamless collaboration. It delivers 20% greater power savings than previous models and features ultra-responsive 50-point touch precision for smooth, accurate interaction.

Available in a range of sizes 65" 4K | 75" 4K | 86" 4K




More features. Better performance. Less cost.

Designed for modern classrooms, it includes advanced digital whiteboarding, effortless wireless casting, and centralised device management software.



The Key Features

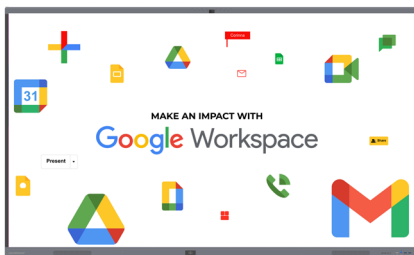

Google EDLA-Certified

Access your go-to apps, Google Drive, Docs, Sheets, Slides, Teams, Word, PowerPoint, and more, right from the screen via Google Play. Manage access and implement download restrictions to stay in control.



Integrated Camera

Built-in 8 array mic and 50M automatic focus camera.



Reduce energy costs by 20%

Compared to previous generations. Sustainable design with ultra-low power standby mode - a win for your budget and the environment.



Software included at no extra cost



Your IT team can control, update, and troubleshoot a fleet of Clevertouch screens without being in the room, ensuring your users always have the latest versions of apps and software.

[Learn More](#)



LYNX Whiteboard is a free, dynamic app for building engaging sessions, whether for lessons or presentations. Designed for real-time collaboration, it offers the most intuitive user experience of any whiteboard, supporting interaction, creativity, and cloud access across environments.

[Learn More](#)



Download the Clevershare App to your phone, tablet or laptop, and connect instantly by typing in the code shown on the Clevertouch screen. The Clevershare App is free to download and compatible with Android, Windows, iOS, and Chrome devices.

[Learn More](#)



CleverLive is a cloud digital signage content management platform which connects all your Clevertouch products enabling broadcasting of messages, announcements and alerts. Use editable templates or create your own presentation.

[Learn More](#)

Features



SD Card Player for expandable storage up to 648 GB



Anti-Glare Display reduces reflections and improves the viewing experience in brightly lit rooms or rooms with windows.



The most fluid, lag-free writing experience on a touchscreen with true 4K high Precision Technology.



2x 20W front speakers



Sync with Google Drive, OneDrive, and Dropbox - work anywhere, anytime.



Built-in 8 array mic and 50M automatic focus camera for instant video calls, remote collaboration, or hybrid learning.



Wireless or hardwired connections so team members and visitors can connect safely using separate networks.



Seamless integration with room booking system - Sync with your MS Exchange™ and Outlook 365 calendars.



Improve communication with instant messages and alerts using CleverLive digital signage.



Comprehensive warranty with Clevertouch distribution partners.



Instant Over-the-Air Updates (OTA) seamlessly delivered to your display.



Specifications

Display

Diagonal Size	65" 4K 75" 4K 86" 4K
Panel Type	VA
Response Time	6.5ms
Aspect Ratio	16:9
Display Area	1428.48(H) × 803.52(V)mm
Pixel Pitch	0.372 × 0.372mm
Resolution	3840(H) × 2160(V)
Refreshing Frequency	60Hz
Display Color	1.07B(10bit)
NTSC	72%
Contrast Ratio	65" 5000:1 75" 5500:1 86" 1200:1
Viewing Angle	178° (H/V)
Back Light Unit	DLED
Brightness with glass(min)	350cd/m ²
Brightness with glass(typ)	400cd/m ²
Operation Time	7 days × 16 hours
Life Time	≥30000 Hours

Operating System

System Version	Android 14.0
RAM+ROM	8G+128G
CPU	A72×4+A53×4
GPU	Mali G52 MC3

Touch System

Sensing Type	Infrared recognition
Touch Tool	Passive infrared pen
Accuracy	±1mm
Touch Point	50 points touch
Minimum object size	2mm
Writing Height	1mm
Interpolation Resolution	32768(W)×32768(D)
Response Time	≤2.5ms
System	Windows10/Windows8/Windows7/Android/Linux/ Mac OS X/Chrome
Palm Rejection	Support
Pressure	Passive stylus pressure sensitivity

Audio

Sound Channel	2.0
Speaker Power	2×20W
Sound pressure level	85dB SPL

Microphone

Quantity	8
Distance of a pickup	0~8m

Camera

Quantity	1
Pixel	50M
Position	Middle of the top border

Power

Power Requirements	65": 100-240V~50/60Hz 5.0A 75": 100-240V~50/60Hz 5.0A 86": 100-240V~50/60Hz 5.0A
Typical Power*[1]	175W
Max Power*[2] (W/OPS)	300W

I/O Port

HDMI IN	3	Up to 4K@60Hz
HDMI OUT	1	Up to 4K@60Hz
USB 2.0	1	For system upgrades
USB 3.0	4	Front*2, Rear*2; All USB can auto switch to current channel
USB Type-C IN	2	Front: Up to PD 65W (PD15W when OPS is plugged in); Onboard: PD15W
Touch 3.0	2	Front*1, Rear*1
DP IN	1	4K60Hz
VGA IN	1	Up to 1080P@60Hz
AUDIO IN	1	3.5mm Jack (Local amplification)
AUDIO OUT	1	3.5mm Jack
SPDIF	1	PCM output format
RS232	1	Baud rate 9600
RJ45 IN	1	10M/100M/1000Mbps
RJ45 OUT	1	10M/100M/1000Mbps
TF Card	1	TF card slot

Physical Specifications

Panel Dimensions	65": 1488×908×86mm 75": 1709.4×1031×85.5mm 86": 1957×1171×97mm
Packed Dimensions	65": 35.05kg 75": 46.75kg 86": 55.00kg
Thickness of machine and wall mount	127.4mm (WIB6540B)
Wall-hanging Screw Spec	M8×25mm
VESA Mount Point	65": 600×400mm 75": 800×400mm 86": 800×600mm
Net Weight	65": 35.05kg 75": 46.75kg 86": 55.00kg
Gross Weight	39.10kg

Accessories

Power Cord	x1
Writing Pen	x2

Specifications

Environmental Conditions

Operation Temperature	0°C - 40°C
Operation Humidity	10%-90% RH
Storage Temperature	-20°C - 60°C
Storage Humidity	10%-90% RH
Altitude	Below 5000 meters

Optional Module

PC Module	OPS72A
Android Module	SA12-A-G
Wireless Module	SI07B;SI07E


[1]: Without OPS, after the user menu is restored to the factory setting, it starts up without anysetting and the port is not loaded.

*[2]: With OPS, OPS plays the color bar signal and runs the burning test. Port full load, user menu: Volume 100%, backlight 100%, brightness contrast 100%.


Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

86"

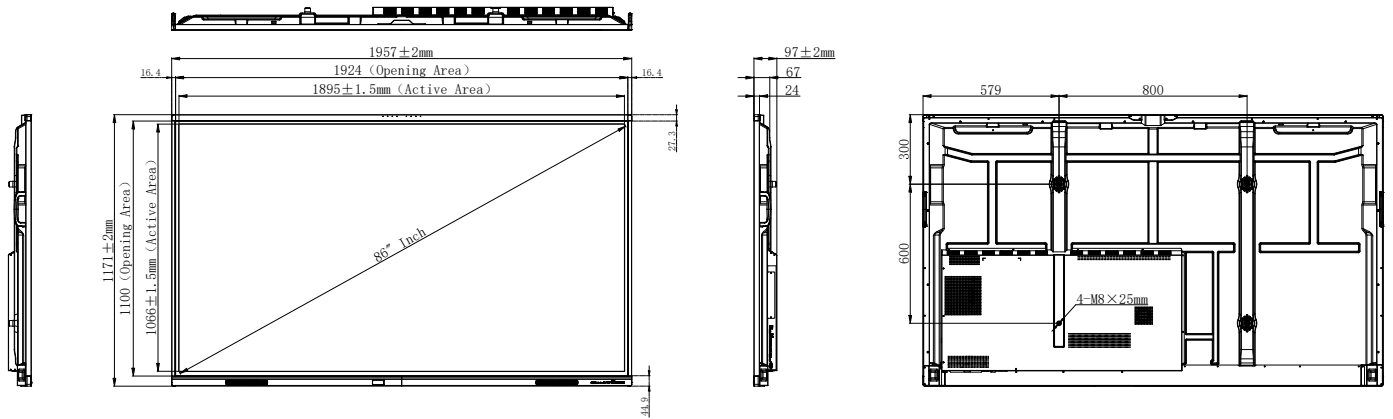

75"

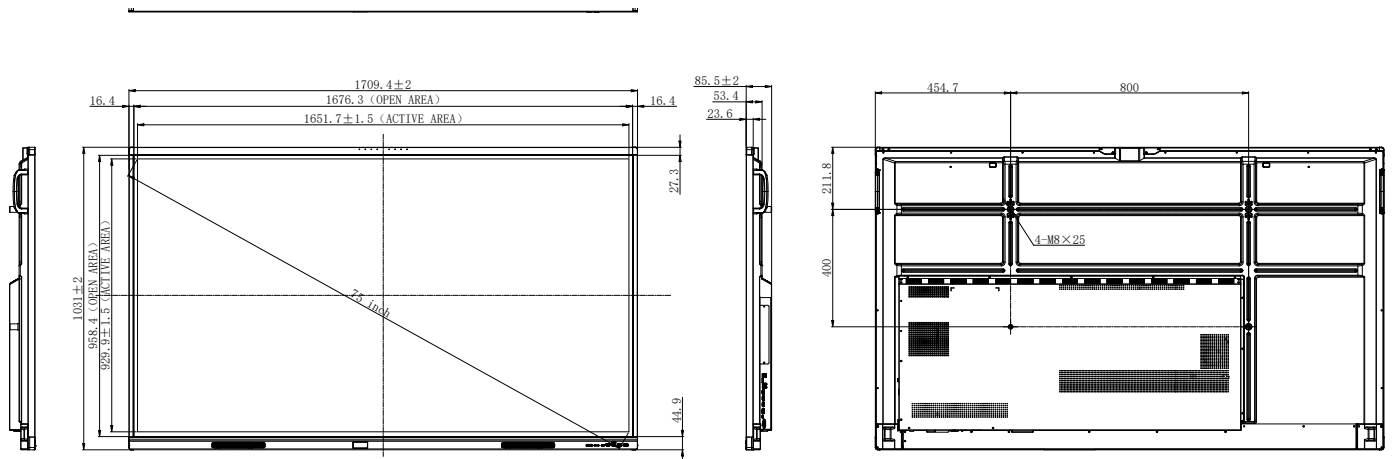

65"

