


Key Features

- Multi-tasking capabilities for enhanced lesson delivery
- •Embrace simplicity and organization with the USB-C onecable solution, offering 65W of Power Delivery.
- •Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11

Product **Description**



The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cuttingedge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

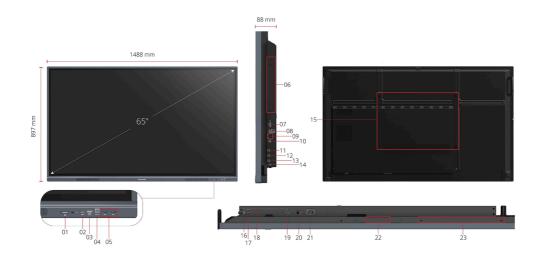

- 1. POWER ON/OFF
- 2. USB C
- 3. HDMI 1
- 4. TOUCH 1
- 5. USB 3.0x2
- 6. OPS Slot
- 7. RS-232
- 8. LAN
- 9. USB 2.0x2
- 10. TOUCH 2 11. HDMI 2
- 12. HDMI 3
- 13. HDMI OUT 14. USB
- 15. VESA® Wall Mount (600x400mm) 22. Wi-Fi Slot

23. Sensor Mount

- 16. SPDIF
- 17. AUDIO in
- 18. AUDIO out 19. VGA
- 20. Power On/OFF
- 21. AC IN

www.viewsonic.com

Visit Us



DISPLAY		EMBEDDED OS	
Panel Size:	65"	Android 11	
Panel Type:	TFT LCD Module with DLED Backlight. IPS	BUNDLE SOFTWARE	
		Basic Annotation Software:	myViewBoard Whiteboard
Display Area (mm):	1428.48(H) × 803.52(V) (64.5" diagonal)	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Aspect Ratio:	16:9	Wireless Presentation:	myViewBoard Display
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation with Touc	sh.
Colors:	1.07B colors	Feedback: Viewboard Cast:	Yes
Brightness:	350 nits	SPECIAL FEATURES	
Contrast Ratio:	5000:1 (max. with DCR enabled)	All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to
Response Time:	8ms		all channels.
Viewing Angles:	H=178, V=178	Simple LAN sharing between IFP and slot-in device: Light Sensor:	2 10/100M for Android & Slot-in PC Yes
Backlight Life:	50,000 Hours (8 hours of use per day)		
Surface Treatment:	Hardness: 7H Anti-glare coating	POWER	100
Orientation:	Landscape	Voltage:	100-240V AC
PLATFORM		Consumption:	On:99W ; Off: ≤ 0.5W
	Quad-core ARM Cortex	ERGONOMICS	
Processor:	(A55*4)	Wall Mount (VESA®):	600*400
RAM:	8GB DDR4	OPERATING CONDITIONS	
Storage:	128 GB	Temperature (° C):	0°C to 40°C
тоисн		Humidity:	20% ~ 80% RH non-
Type/ Tech:	Ultra Fine Touch Technology	,	condensing
Touch Point:	40 points touch	DIMENSIONS (W X H X D)	1400 v 007 v 00 mm / 50 6 v
INPUT		Physical (inch / mm):	1488 x 897 x 88 mm / 58.6 x 35.3 x 3.5 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	1628x1005x208 mm / 64.1x 39.6x 8.2in
RGB / VGA:	x1	WEIGHT	
Audio:	x1	Net (lb / kg):	77.1lb/34.95kg
RS232:	x1	Gross (lb / kg):	98.5 lb/44.7kg
OPS:	x1 (Optional Intel Standard OPS)	REGULATIONS	
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS	
OUTPUT		PACKAGE CONTENTS	
HDMI:	HDMI 2.0 x1	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5 Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m	
Audio:	x1		
SPDIF:	x1		
LAN		COMPATIBLE SLOT-IN PC	
RJ45:	x2	VPC2-O series/VPC2-O-1B seri	es/VPC12-WPO-15/16
USB			
Type A:	USB3.0:Front x2, Rear x2; USB2.0 x1		
Type B:	x2 (Rear x1 + Front x1)		
Type C:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		
SPEAKERS	•		
16W x 2			
TOP CAMERA PLATE			
.,			

Yes