

# DS-D51C08D Document Camera



- 8 million pixel HD camera
- auto focus, fast imaging
- built-in LED fill light, three dimming
- booth imaging screen real-time annotation, support comparison and explanation
- A4 format metal plate, bearing stability
- arc chamfer design, safe and reliable



## Specification

Product Model	
Product Model	DS-D51C08D
General	
Standby Current	140mA
Attachment	USB-AM-BM*5m*1,Expansion screw*3,Wall mounted bracket*1,Installation Guide*1
Plastic Material	ABS
Transfer Mode	USB 2.0
Voltage	4.9V~5.2V
Working Current Range	<450mA
Usage Environment	Temperature (-20°C ~45°C) Humidity (0-70%RH)
Storage Environment	Temperature (-20°C ~55°C) Humidity (0-70%RH)
Camera	Temperature ( 20 C 33 C) Humany (0 70% (1)
Image Sensor	8.0 Megapixel CMOS; Max resolution 3264*2448
Frame Rate	3264*2448@10fps/s;1080P@25~30fps/s
MHz	5204 2448@101ps/s,1080F@23 301ps/s
Shooting Area Video Format	≥A4 Rotatable Angle MJPG
	AF+MF
AF	1" 1"
Lens Protector	IP41
TVLine	1300~1500TVL Max
Fill Light	
Dimming Mode	Three-stage dimming
Dimming Method	Touch dimming
Туре	LED
USB	
Touch USB	USB- Type B x 2
Hardware Interface	USB 2.0 UVC BM x 2
UVC	Windows/Android
Appearance Structure	
Appearance Color	Black
Product Size	Pack up: 420mm*253mm*85mm; Extend: 420mm*253mm*415mm
Opening and Closing Mode	Magnetic suction\mechanical lock
Packaging Information	
Package Size	single package: 480*135*315mm; pack of four: 570*500*340mm
	N.W:3.3KG
Weigh	G.W:3.8KG
	Pack of four full case weight: G.W:16KG


#### Available Model


DS-D51C08D




## Dimension



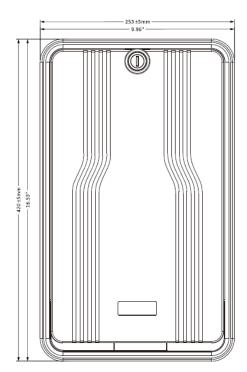



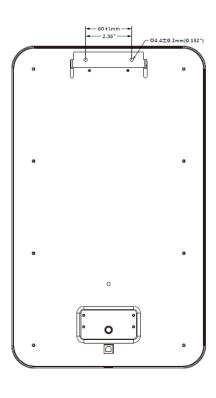

# See Far, Go Further



www.hikvision.com support@hikvision.com















