Datasheet

DiskStation

DS1525+





DS1525+



Flexible All-Purpose Data Management Platform

Synology DS1525+ is a versatile 5-bay storage solution that scales with your needs, with support for storage expansion, 10GbE networking, 2 and SSD caching 3. Built-in 2.5GbE networking provides excellent networking performance out of the box. Powered by Synology DiskStation Manager (DSM), this device is a flexible all-in-one solution for data sharing, synchronization, backup, and surveillance.

• Dependable Performance

Up to 1,181/1,180 MB/s sequential read/write throughput⁴ supports stable data transfers

Fast Networking

Built-in 2.5GbE ports for fast connectivity out of the box with support for 10GbE

• Versatile Network Storage

Leverage built-in file and photo management, data protection, virtualization, and surveillance solutions

Capacity Expansion

Add 10 extra drive bays for up to 300 TB⁵ of raw storage with two DX525 expansion unit¹

• Extendable Product Support

Backed by Synology's 3-year limited hardware warranty, extendable to 5 years in select markets^{6,7}

Versatile Storage for Any Purpose

The DS1525+ offers intuitive and comprehensive file management, media organization, and backup options right out of the box. Its capable performance, compact size, and versatile configuration options make it ideal for IT enthusiasts, creative professionals, and businesses of various sizes, from small firms to large enterprises as an edge device for branch offices or retail locations.

- Up to 1,181 MB/s sequential read and 1,180 MB/s sequential write performance⁴ enables fast file sharing, syncing, streaming, and backup for multiple users
- Two 2.5GbE ports offer fast networking, with Link Aggregation supporting failover and load balancing capabilities
- Support for 10GbE networking via 10GbE RJ-45 Network Upgrade Module provides versatility and futureproofing
- Supports 5 × 2.5" SATA SSD and 3.5" SATA HDD.⁸ Synology hard drives and SSDs are designed
 to integrate seamlessly with Synology systems, delivering exceptional reliability
- Expandable to 15 drives for up to 300 TB of raw storage with two Synology DX525 expansion units¹
- Two built-in M.2 slots provide SSD caching³ capability without occupying drive bays

Ease of Use and Security Features

A suite of convenience and security features, combined with DSM's intuitive UI, ensures a seamless experience for users of all levels of expertise.

- Easily access your system from any web browser via QuickConnect
- Adaptive Multi-Factor Authentication (AMFA) triggers upon suspicious external logins,
 providing an additional layer of security
- Improve management efficiency with **customizable delegation roles**, allowing admins to quickly assign roles to non-admin users while restricting access to critical system settings
- Active Insight⁹, Synology's cloud-based fleet monitoring solution, leverages machine learning
 to detect malware and other malicious activity and automatically creates immutable snapshots
 to protect your data

A Collaboration, Communication, and Organization Hub

Synology provides a private cloud solution for on-site and remote workers, as well as home users, to concurrently edit documents, share files, manage emails, send instant messages, manage photos, and more.

- Synology Drive serves as a centralized hub to keep your files labeled and organized for easy access, offering granular file sharing permissions and customizable security features to ensure file safety
- Synology Photos provides a comprehensive solution for storing, organizing, and sharing photos and videos, with powerful features suitable for both personal and professional use
- Synology Office enables users to collaborate on documents, spreadsheets, and presentation slides in real time, supported by convenient options such as file versioning for easy restoration and password protection
- Synology Chat brings teams together with one-on-one chats, group chats, and encrypted private channels over multiple platforms
- Synology MailPlus¹⁰ provides a secure, reliable, and private email server
- Synology Calendar helps teams keep track of priorities with convenient calendar sharing and scheduling
- Synology Hybrid Share¹¹ enhances multi-site teamwork with a global hybrid cloud file system which combines the scalability of the cloud with the fast local access provided by Synology systems

Reliable Virtualization and Containerization

Leverage your Synology system as **virtual machine storage**, and alternative container or VM host, with full certification for VMware® vSphere™, Microsoft® Hyper-V®, Citrix® XenServer™, and OpenStack environments.

- Synology Storage Console for VMware or Windows platforms lets you manage VM storage components directly from your hypervisor. VMware VAAI integration and Windows ODX help offload storage operations and speed up data transfers
- Host lightweight containers and VMs for testing, sandboxing, and emergency recovery
 purposes with Container Manager and Synology Virtual Machine Manager, a native hypervisor
 that supports Windows, Linux, and virtual versions of DSM¹²

Private Video Surveillance


Synology Surveillance Station transforms any Synology system into a powerful network video recorder (NVR).¹³

- 8,700+ supported camera models
- ONVIF support for a broader selection of cameras
- · Private, subscription-free storage of recordings
- Access through web browsers, desktop clients, and mobile apps
- · Event-based rules to trigger specific actions
- Email, SMS, and push notification options
- Simultaneous recording to the cloud with C2 Backup for Surveillance for an extra layer of data protection and more convenient sharing¹⁴

Notes:

- 1. DS1525+ supports up to 15 drives with two Synology DX525 expansion units, sold separately.
- 2. One 10GbE RJ-45 port can be added to the DS1525+ with Synology E10G22-T1-Mini Network Upgrade Module.
- 3. Synology Enterprise SATA SSDs or M.2 NVMe SSDs enable SSD caching. M.2 NVMe SSDs can also create storage pools. Drives sold separately.
- 4. Performance figures obtained through internal testing by Synology. Actual performance may vary depending on the testing environment, usage, and configuration. See performance charts for more information.
- 5. Raw capacity calculated using 20 TB drives. Usable storage capacity may vary depending on drives used and RAID configuration.
- 6. Up to 5 years of warranty are available as an additional bundle with Extended Warranty Plus or Extended Warranty, both 2-year extended warranty service add-ons available in select regions. Check availability for Extended Warranty or Extended Warranty Plus.
- 7. The warranty period starts from the date of purchase as stated on your purchase receipt. Visit https://www.synology.com/company/legal/warranty for more information.
- 8. Compatible drives are mandatory. Please consult our compatibility list before purchasing hard drives. For more details, please refer to this article.
- 9. Synology Active Insight includes three free licenses. Additional licenses can be added with the purchase of an annual subscription.
- 10. Synology MailPlus includes five email accounts free of charge. Additional email accounts can be added with the purchase of Synology MailPlus License Packs. Learn more
- 11. Hybrid Share requires purchase of an annual or monthly subscription. A free trial is available for each newly registered device.
- 12. Certain advanced features require Virtual Machine Manager Pro. One Virtual DSM license is included. Additional Virtual DSM instances require the purchase of Virtual DSM Licenses.
- 13. Surveillance Station includes two free licenses. Connecting more cameras and devices requires additional licenses. Learn more
- 14. C2 Backup for Surveillance requires purchase of an eligible annual subscription. Each additional channel requires a separate subscription. A free trial is available.

Hardware Overview

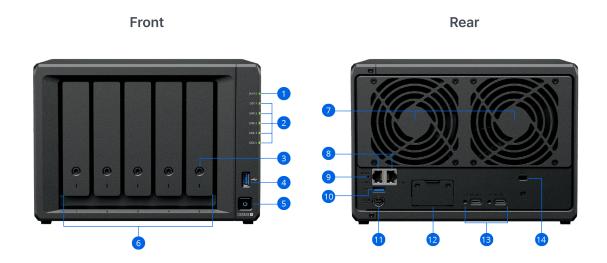

No.	Name	No.	Name
1.	Status indicator	8.	2.5GbE RJ-45 ports
2.	Drive status indicators	9.	Reset button
3.	Drive tray lock	10.	USB 3.2 Gen 1 port
4.	USB 3.2 Gen 1 port	11.	Power port
5.	Power button and indicator	12.	Network upgrade slot
6.	Drive trays	13.	Expansion ports
7.	Fans	14.	Kensington security slot

Technical Specifications

Hardware

CPU		
CPU Model	AMD Ryzen V1500B	
CPU Quantity	1	
CPU Core	4	
CPU Architecture	64-bit	
CPU Frequency	2.2 GHz	
Hardware Encryption Engine	Yes	

Memory		
System Memory	8 GB DDR4 ECC SODIMM	
Memory Module Pre-installed	8 GB (8 GB x 1)	
Total Memory Slots	2	
Maximum Memory Capacity	32 GB (16 GB x 2)	
Notes	Please select Synology memory modules for optimum compatibility and reliability. Synology will not provide complete product warranty or technical support if non-Synology memory modules are used for memory expansion.	

Storage	
Drive Bays	5
Maximum Drive Bays with Expansion Unit	15 (DX525 × 2)
M.2 Drive Slots	2 (NVMe)
Drive Type	3.5" SATA HDD2.5" SATA SSDM.2 2280 NVMe SSD
Hot Swappable Drive	Yes
Notes	 The hot swappable drive feature is not supported by M.2 SSD slots. Compatible drives are mandatory. Please consult our compatibility list before purchasing hard drives. For more details, please refer to this article.

External Ports	
RJ-45 2.5GbE LAN Port	2
USB 3.2 Gen 1 Port	2
Expansion Port	2

PCle	
PCIe Expansion	1 x Gen3 ×2 network upgrade slot

Appearance		
Size (Height x Width x Depth)	166 mm x 230 mm x 223 mm	
Weight	2.67 kg	

Others	
System Fan	92 mm x 92 mm x 25 mm x 2 pcs
AC Input Power Voltage	100V to 240V AC
Power Frequency	50/60 Hz, Single Phase

Temperature	
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-5°F to 140°F)
Operating Humidity	8% to 80% RH
Storage Humidity	5% to 95% RH
Maximum Operating Altitude	5,000 m

General DSM Specifications

Storage Management	
Maximum Single Volume Size	200 TB (32 GB memory required)108 TB
Maximum Internal Volume Number	32
SSD Read/Write Cache (Determining cache size)	Yes
Supported RAID Type	Synology Hybrid RAID,Basic,JBOD,RAID 0,RAID 1,RAID 5,RAID 6,RAID 10
Notes	 Volumes over 108 TB require 32 GB of memory or more. Actual maximum storage pool and volume sizes depend on drive sizes used, the number of drive bays available, and the RAID configuration. Usable capacity for each volume will be lower than the maximum volume size and is dependent on the filesystem and the amount of system metadata stored. Creating M.2 storage pools requires the use of Synology-verified SSDs, which are rigorously tested under extreme temperature conditions. Thermal parameters for SSDs and NAS units are fine-tuned to ensure optimal management of thermal conditions under I/O-intensive environments. (Learn more)

File System	
Internal Drives	Btrfs,ext4
External Drives	Btrfs,ext4,ext3,FAT32,NTFS,HFS+,exFAT

File Services	
File Protocol	SMB,AFP,NFS,FTP,WebDAV,Rsync
Maximum Number of SMB Connections (FSCT-Based)	40
Windows Access Control List (ACL) Integration	Yes
NFS Kerberos Authentication	Yes

Account & Shared Folder	
Maximum Local User Accounts	1,024
Maximum Local Groups	256
Maximum Shared Folder	256
Maximum Shared Folder Sync Tasks	8

Virtualization	
VMware vSphere	ESXi 8.0 U2, ESXi 8.0 U1, ESXi 8.0, ESXi 7.0 U3, ESXi 7.0 U2, ESXi 7.0 U1, ESXi 7.0, ESXi 6.7 U3, ESXi 6.7 U2, ESXi 6.7 U1, ESXi 6.7, ESXi 6.5 U3, ESXi 6.5 U2, ESXi 6.5 U1, ESXi 6.5
Microsoft Hyper-V	Windows Server 2022
Citrix XenServer	XenServer 8, Citrix Hypervisor 8.2 LTSR CU1
OpenStack	Cinder

Security

Firewall, encryption shared folder, SMB encryption, FTP over SSL/TLS, SFTP, rsync over SSH, login auto block, Let's Encrypt support, HTTPS (customizable cipher suite)

General Specifications	
Supported Protocols	SMB1 (CIFS), SMB2, SMB3, NFSv3, NFSv4, NFSv4.1, NFS Kerberized sessions, iSCSI, HTTP, HTTPs, FTP, SNMP, LDAP, CalDAV
Supported Browsers	Chrome,Firefox,Edge,Safari
Supported Language	English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svenska, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, ภาษาไทย, 日本語, 한국어, 繁體中文, 简体中文
Notes	For an updated list of supported browser versions, check the DSM Technical Specifications.

Packages and Applications

Synology Al Console

Centralize Al management with flexible configurations for Al model integration, user access control, data privacy, usage policies, and resource allocation

Third-Party Al Model Integration	V
Maximum De-Identification Rate	40 words per second
Notes	 De-identification performance measurement: Filters for Credit Card Numbers, IBAN, Individual Taxpayer Identification Number, SSN, and Names applied to a 4,355-word English text. To enable de-identification, your device must have at least 8 GB of memory and Container Manager installed.

Synology Drive

Synchronizes files across Windows®, macOS®, Linux®, Android™ and iOS. The built-in cross-platform portal allows access to data anytime and anywhere

Maximum Number of Users	80
Maximum Number of Hosted Files	500,000 (applies to files indexed or hosted by Synology Drive. For file access through other standard protocols, refer to the File Services section above)

File Station

Provides virtual drives, remote folders, Windows® ACL editor, compression/extraction of archived files, bandwidth control for specific users/groups, creation of sharing links, and transfer logs

Hybrid Share

Synchronize data across multiple sites for fast and efficient multi-site teamwork. Powered by Synology C2 Storage, Hybrid Share requires purchase of a monthly or annual subscription

SAN Manager	
Maximum iSCSI Target Number	64
Maximum LUN	128
LUN Clone/Snapshot, Windows ODX	Yes

Virtual Machine Manager	
Recommended Virtual Machine Instances	8 (Learn more)
Recommended Virtual DSM Number (Licenses required)	8 (including 1 Free License)

Hyper Backup

Supports local backup, network backup, and data backup to other servers and public clouds, including C2 Storage

Snapshot Replication	
Maximum Snapshots per Shared Folder	256
Maximum of System Snapshots	4,096

Synology High Availability

Reduces service downtime by combining two identical NAS into a high-availability cluster

Synology Chat	
Maximum Number of Users	150

Synology Office	
Maximum Number of Users	80

Synology MailPlus / MailPlus Server

A secure, reliable, and private mail solution featuring high-availability, load balancing, security, and filtering options

Free Email Accounts	5 (Additional accounts require purchase of licenses)
Maximum Number of Users	100

Surveillance Station	
Default Licenses	2 (Additional cameras require purchase of licenses)
Suggested Maximum IP Cameras and Total FPS (H.264)	 1080p: 40 channels, 1050 FPS 3M: 40 channels, 600 FPS 5M: 30 channels, 360 FPS 4K: 20 channels, 200 FPS
Suggested Maximum IP Cameras and Total FPS (H.265)	 1080p: 40 channels, 1200 FPS 3M: 40 channels, 1000 FPS 5M: 40 channels, 600 FPS 4K: 30 channels, 300 FPS

Central Management System

Provides a single interface to manage and monitor multiple Synology NAS

VPN Server	
Maximum Connections	8

Other packages

Additional 3rd-party packages are available in the Package Center

Environment & Packaging

Environment safety

RoHS Compliant

Packaging Content

- Main Unit X 1
- Accessory Pack X 1
- AC Power Adapter X 1
- AC Power Cord X 1
- RJ-45 LAN Cable X 2

Optional Accessories

- DDR4 ECC SODIMM: D4ES03-8G/D4ES03-16G
- Expansion Units: DX525
- Enterprise Series 3.5" SATA HDD: HAT5300 Series
- Plus Series 3.5" SATA HDD: HAT3300 Series
- Enterprise Series 2.5" SATA SSD: SAT5200 Series
- Enterprise Series M.2 2280 NVMe SSD: SNV3400 & SNV5400 Series
- 10GbE Network Upgrade Module: E10G22-T1-Mini

For multi-module memory configurations, all modules must be
identical and share the same model number. Check the Product
Manual of your Synology product for recommended memory
configurations.

Warranty

3-year hardware warranty, extendable to 5 years with EW201 or Extended Warranty Plus

Notes

- The warranty period starts from the purchase date as stated on your purchase receipt. (Learn more)
- Extended Warranty Plus is only available in Europe and North America. EW201/EW202 is only available in Asia, Africa, and Oceania. For exact availability information please visit their respective websites.

SYNOLOGY INC. © 2025, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.