



VIEWBOARD

ViewBoard IFP92UW


Key Features

- Ultrawide 92" screen enhances multitasking and collaboration.
- 5K resolution provides crystal-clear visuals and precise details.
- 21:9 aspect ratio optimized for Microsoft Teams Rooms Front Row mode.
- Comprehensive 8-mic array and 2.1 channel 60W speaker system for superior audio.
- Dual USB-C ports deliver streamlined connectivity and boost productivity.



Product Description

The ViewBoard® IFP92UW delivers an expansive interactive experience with its 21:9 aspect ratio, optimized for Microsoft Teams Rooms and Front Row mode, and stunning 5K resolution. This ultrawide 92" display facilitates multitasking with split-screen functionality, enhancing collaboration and productivity in team huddles, meetings, and brainstorming sessions. It boasts highly responsive 50-point touch capabilities that capture every input naturally and intuitively, offering pen-on-paper precision, complemented by seamless wireless screen casting through vCast. Additionally, an 8-microphone array and 60W soundbar ensure optimal audio clarity for both in-room and remote participants.

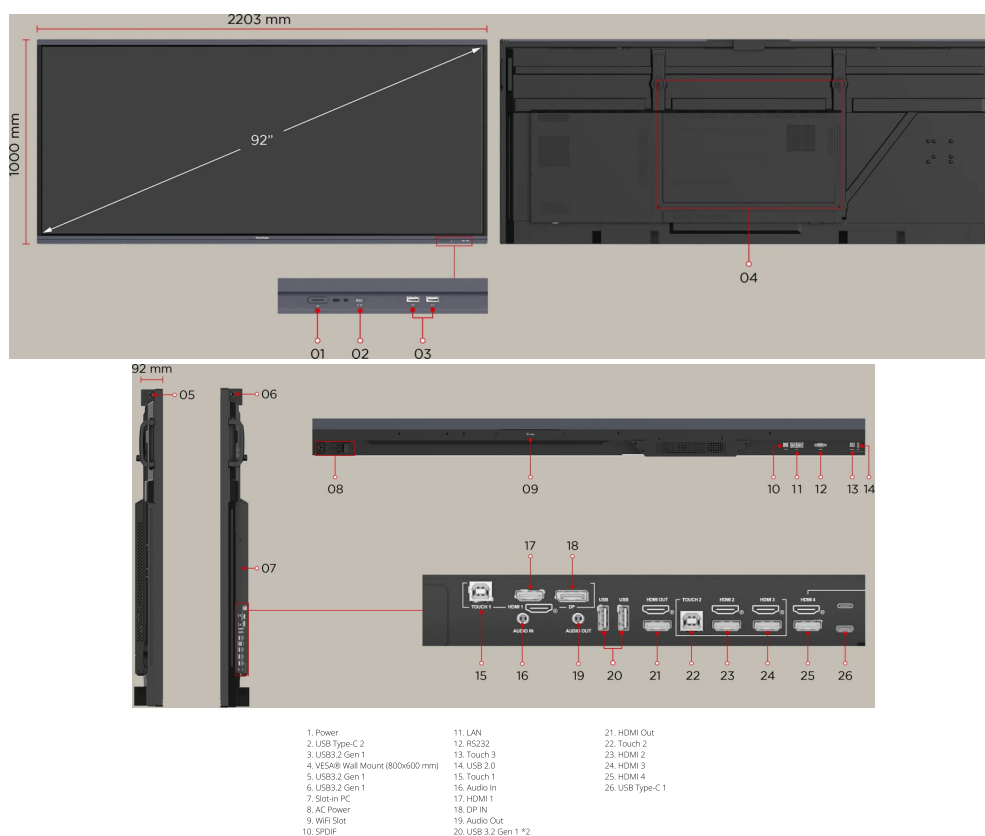

Visit Us

www.viewsonic.com



DISPLAY		OPERATING CONDITIONS	
Panel Size:	92"	Temperature (° C):	0°C to 40°C
Panel Type:	TFT LCD Module with DLED Backlight, VA	Humidity:	20% ~ 80% RH non-condensing
Display Area (mm):	2141.952(H) × 903.636(V) (91.52" diagonal)	DIMENSIONS (W X H X D)	
Aspect Ratio:	21:9	Physical (inch / mm):	86.73 x 39.37 x 3.62 in / 2203 x 1000 x 92mm
Resolution:	WUHD 5120x2160(Pixels)	Packaging (inch / mm):	92.52 x 44.72 x 8.5 in / 2350 x 1136 x 216mm
Colors:	1.07G colors (8bits+ 2bits FRC)	WEIGHT	
Brightness:	500nits (Typ.)	Net (lb / kg):	147.7lb/ 67kg
Contrast Ratio:	OC spec 5000:1 (typ.)	Gross (lb / kg):	183lb/ 83kg
Response Time:	<6.5ms	REGULATIONS	
Viewing Angles:	H = 178, V = 178 (Typ.)	eTUVus, FCC/ICES003, CE/EMC, CB/LVD, EAC, UkrSEPRO, UKCA, UK-EEL, LBL, FF, ErP-EEL, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE, EPEAT	
Backlight Life:	50,000hrs (typ.)	PACKAGE CONTENTS	
Surface Treatment:	Panel Hard Coating 3H Glass Anti-Glare + Anti-Fingerprint (7H Mohs; 9H pencil hardness)	1. 3m power cord by ship area	
Bezel:	19.48/19.48/29.78/41.18 mm	2. Type C cable 1.8m(USB-IF certified)	
Orientation:	Landscape	3. Remote control with AAA battery x 2	
PLATFORM		4. 3m touch USB cable(USB 2.0)	
Processor:	RK3588 Octa-Core CPU (A76*4 + A55*4)	5. Touch pen x 2 (VB-PEN-002)	
RAM:	DDR4 8GB	6. Quick Start Guide with Compliance statement	
Storage:	128GB eMMC	7. RS232 adapter	
TOUCH		8. Clamp x 5	
Type/ Tech:	IR Recognition	9. Camera Plate x 2 (1 for VB-CAM-201, 1 for UMB202)	
Touch Resolution:	32767 x 32767	10. Screw x 8 (camera 2+2, wall mount 4)	
Touch Point:	Windows: 50 Android and all other channels: 32	11. HDMI cable 3m (HDMI LA certified)	
INPUT		COMPATIBLE SLOT-IN PC	
HDMI:	Rear x4 (HDMI 2.1x 1, HDMI 2.0 x3)	VPC3X series / VPCF5-2A	
DisplayPort:	1		
Audio:	1		
RS232:	1		
OPS:	1 (OPS Slot 80pin)		
WiFi:	1 (Module Slot)		
OUTPUT			
HDMI:	1		
Audio:	1		
SPDIF:	1		
LAN			
RJ45:	1 in 1 out (Android & PC 10M/100M/1000Mbps)		
USB			
Type A:	REAR x 1 (USB 2.0 support OTG) REAR x 2 (USB 3.2 Gen 1) FRONT x 2 (USB 3.2 Gen 1) TOP x 2 (USB 3.2 Gen 1)		
Type B:	REAR x 3 (USB 2.0)		
Type C:	FRONT x1 (1*PD15W + DP1.2 + Data + 10M/100M sharing, USB 3.2 Gen 1) REAR x1 [1*PD65W(65W with OPS, 100W without OPS) + DP1.2 + Data + 10M/100M sharing, USB 2.0]		
SPEAKERS			
20W x 2+ 20W x 1 (Subwoofer)			
MICROPHONE			
Built-in 8 Array Microphone			
COMPATIBILITY			
HDMI:	HDMI 1: 5120x2160 @60Hz (YUV444), 5120x2160 @30Hz (YUV420) HDMI 2/3/4: 3840x2160 @60Hz		
DisplayPort:	5120x2160		
EMBEDDED OS			
Android 13			
BUNDLED SOFTWARE			
Basic Annotation Software:	myViewBoard Whiteboard for Android		
Pro Annotation Software:	myViewBoard Whiteboard for Windows (embedded in VPC)		
Wireless Presentation:	myViewBoard Display, vCast, AirSync* *myViewBoard Display will be replaced by AirSync in Q1 2025.		
Device Management:	ViewSonic® Manager		
ViewSonic Launcher:	Yes		
SPECIAL FEATURES			
All-in-one USB port:	USB 3.2 Gen 1 "SmartPort USB" to all channels		
Simple LAN sharing between IFP and slot-in device:	(10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)		
Light Sensor:	Yes		
POWER			
Voltage:	100-240VAC +/- 10% Wide Range		
Consumption:	On: 151.24W(Energy Star) / Off: <0.5W		
ERGONOMICS			
Wall Mount (VESA®):	800 x 600		