


## **Key Features**

- Instant, secure access to your digital workspace using Windows Hello
- Crystal-clear video with 5MP webcam, privacy cover, dual microphones, and stereo speakers
- 120Hz refresh rate ensures ultra-smooth visuals during meetings and multitasking
- USB-C port simplifies connections for audio, video, and data transfer
- USB 3.2 hub with 1 USB-C upstream, 3 USB downstream ports, HDMI, and DisplayPort inputs for seamless multi-device connectivity



## Product **Description**

The VG2441V is a 24" Full HD (1920 x 1080) USB-C video conferencing monitor with Windows Hello, designed to deliver secure, high-quality virtual meetings straight out of the box. With facial recognition login via Windows Hello, users can sign in quickly and securely—reducing password fatigue and minimising the risk of visual hacking. A built-in 5MP adjustable webcam, dual microphones, and dual 2W speakers provide sharp video and clear audio for professional-grade conferencing. The webcam's ±5° vertical tilt ensures perfect framing, while the built-in privacy cover safeguards user privacy when the camera is not in use. The monitor supports streamlined connectivity with a USB-C upstream port for video, audio, and data, plus HDMI, DisplayPort, and three USB 3.2 downstream ports—making it ideal for both home and office environments. With a 120Hz refresh rate and integrated Eye ProTech+ technology (low blue light and flicker-free viewing), the VG2441V ensures smooth visuals and greater eye comfort throughout the workday. For additional productivity, it supports vDisplay Manager for on-screen control and vSplit for efficient window layout management—both available via the ViewSonic Display Portal. With full ergonomic adjustability including height, tilt, swivel, and pivot, the VG2441V adapts to your setup for long-lasting comfort and flexible workflows.

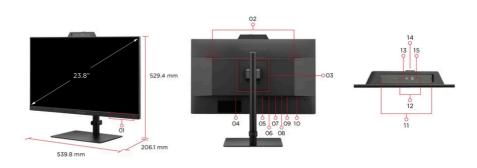

- 1. Menu Control Panel
- 3. VESA Compatible(Wall Mount 100
- x 100mm) 4. Power In
- 4. Power In 5. HDMI 6. Display Por
- 7. USB 3.2 Up Stream (Type C) 8. USB 3.2 Down Stream (Type A)
- 9. Audio Out
- 10. USB Type C (Quick Charging) 11. Microphones
- 13 SMP Camera

**Visit Us** 

www.viewsonic.com

n.en	
DISPLAY Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type: Resolution:	IPS Technology 1920 x 1080
	FHD (Full HD)
Resolution Type:	
Static Contrast Ratio:	1,500:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colours:	16.7M
Colour Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Response Time (GTG w/OD):	4.39ms
Viewing Angles:	178º horizontal, 178º vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	120
Variable Refresh Rate	Yes
Technology:	
Low Blue Light:	Hardware solution
Flicker-Free:	Yes
Colour Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)
COMPATIBILITY	And Glare, Hard Goating (611)
PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920×1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080
CONNECTOR	
USB 3.2 Type A Down Stream:	2
USB 3.2 Type C Down stream:	1 (15W power charger)
USB 3.2 Type C Up Stream; DisplayPort Alt mode :	1
3.5mm Audio Out:	1
HDMI 1.4:	1
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)
AUDIO	o pin ossilot (i.e.o o i i / oeeee)
Internal Speakers:	2Watts x2
POWER	Z Traile XZ
Eco Mode (Conserve):	12W
Eco Mode (optimised):	16W
,	
Consumption (typical):	19W
Consumption (max):	64W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply
ADDITIONAL HARDWARE	
Kensington Lock Slot:	1
Webcam:	5.0M pixel
Cable Organisation:	Yes
Microphone:	Yes
CONTROLS	
Physical Controls:	Key 1 (volume down), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio/MIC Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu
OPERATING CONDITIONS	
OPERATING CONDITIONS Temperature:	32°F to 104°F (0°C to 40°C)
	32°F to 104°F (0°C to 40°C) 20% to 90%
Temperature:	
Temperature: Humidity (non-condensing):	
Temperature: Humidity (non-condensing): WALL MOUNT	20% to 90%
Temperature: Humidity (non-condensing): WALL MOUNT VESA Compatible:	20% to 90%
Temperature: Humidity (non-condensing): WALL MOUNT VESA Compatible: INPUT SIGNAL	20% to 90%  100 x 100 mm
Temperature: Humidity (non-condensing): WALL MOUNT VESA Compatible: INPUT SIGNAL Frequency Horizontal:	20% to 90%  100 x 100 mm  30 ~ 135KHz
Temperature: Humidity (non-condensing): WALL MOUNT VESA Compatible: INPUT SIGNAL Frequency Horizontal: Frequency Vertical:	20% to 90%  100 x 100 mm  30 ~ 135KHz

RGONOMICS	
Height Adjust (mm):	150
Swivel:	90°
Tilt (Forward/Back):	-5° / 20°
Pivot (Right/Left):	90° / 90°
WEIGHT (IMPERIAL)	
Net (lbs):	9.9
Net Without Stand (lbs):	6.4
Gross (lbs):	15
WEIGHT (METRIC)	
Net (kg):	4.5
Net Without Stand (kg):	2.9
Gross (kg):	6.8
DIMENSIONS (IMPERIAL) (W	VXHXD)
Packaging (in.):	24.8 x 20.2 x 4.9
Physical (in.):	21.25 x 15.2~20.84 x 8.11
Physical Without Stand (in.):	21.25 x 13.66 x 2.31
DIMENSIONS (METRIC) (WX	HXD)
Packaging (mm):	630 x 513 x 125
Physical (mm):	539.8 x 386.1~529.4 x 206.1
Physical Without Stand (mm):	539.8 x 346.9 x 58.6
GENERAL	
Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VG2441V x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male- Male; with Type-A adapter) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	5 Year Pick Up, Repair and Return
Power Management:	Energy Star standards, EPEAT