HANNspree

HO105HTB
10.1” Open Frame Touch Monitor

Experts in Display

Open Frame Touch Monitor

HO105HTB

25.65 cm / 10.1“ Diagonal
LED Backlight – Format 16:10

- 1280 x 800 Resolution
- 10-Point Touch P-Cap Technology
- 170° / 170° Wide Viewing Angle
- Dual Input: HDMI + VGA
- IP65 Rating Level (front only)
- 12 Volt External Power Supply
- ≥6H Toughened Hard Panel Surface
- Glass Protection 2mm
- Touch-Through Glass (available upon request*)
- Sturdy Metal Case
- VESA Mount and Multiple Mounting Options
- Edge to Edge glass without raised frame
- Orientation: Landscape, Portrait, Face-Up













25.65 cm / 10.1“

Part No.: HO105HTB



10.1”
16:10 Aspect Ratio



HDMI
VGA



170° Wide
Viewing Angle



10 Points
Touch



1280 x 800



IP 65
Water & Dust
Protection



350cd/m² Panel
Brightness



Touch to
USB Link

Display Solutions

Technical Specifications >>>

* For more details contact your local HSP office / representative
or send us a request via the product enquiry form on the website.


HANNspree


HO105HTB
10.1” Open Frame Touch Monitor

Experts in Display

Display Size	25.65 cm / 10.1“ Diagonal
Panel Type	TFT – LED Backlight, IPS Panel (*)
Aspect Ratio	16:10
Resolution (H x V)	1280 x 800
Brightness	350 cd/m² (Panel) / 300 cd/m² (Monitor)
Contrast (Typ.)	800:1 (Typical)
Viewing Angle L/R; U/D	170° H / 170° V (CR >10)
Response Time	25 msec (Typ.)
Pixel Pitch	0.1695 (H) x 0.1695 (V) mm
Touch Type	Projected Capacitive Type – 10-Point Touch Material Glass + Glass (G+G)
Display Colors	16,7M Colors
Glass Protection	Thickness 2 mm
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 65 (Front), Water and Dust Protection **
Horizontal Frequency	30 ~ 55 kHz
Vertical Frequency	56 ~ 60 Hz
External Power Adapter	DC: 12Volt / 3A
Input 1	VGA (D-Sub)
Input 2	HDMI
Input 3	USB Type B (for Touch function)
Speakers	-
Power Consumption	On: 5W; Stand-by: 0.5W; Off: 0.3W
Product Dimensions	260 x 35.8 x 178 mm (W x D x H)
Packing Dimensions	370 x 90 x 237 mm (W x D x H)
Net / Gross Weight	1.78 Kg / 2.04 Kg

VESA Mounting	75 x 75 mm. Screws: M4, 4mm (Max), pitch 0.7 mm
Controls	Power, Auto, (+), (-), Menu
Color	9300, 7500, 6500, User Mode
Preset Mode	N/A
On Screen Display	9 OSD Languages
LED Backlight life	20000 hours
Accessory	Power Adaptor; EU Power Cord (1.8m); USB 2.0 (B-A) Cable (1.8m); HDMI Cable (2m)
Orientation	Landscape, Portrait, Face-Up

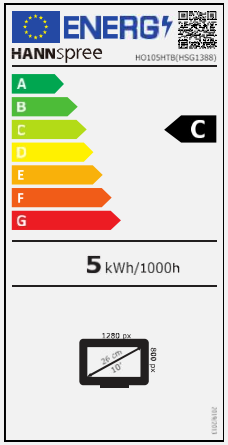

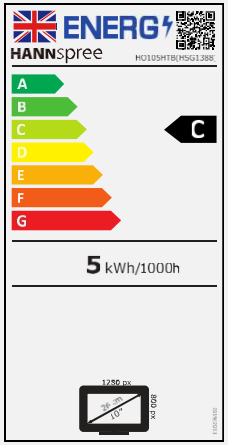

Supplier‘s Name	HANNspree
Model Name	HO105HTB
Energy efficiency class for standard Dynamic Range (SDR)	C
Annual Energy Power Consumption (kWh/1000h)	5 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	5 W
Off mode power demand (W)	0.3 W
Standby mode power demand (W)	0.5 W
Screen Diagonal (cm / inches)	25.65cm/10.1“
Resolution	1280 x 800

PART NO.:
HO105HTB

4 711404 023170 >

© HANNSpree Europe Holdings B.V. Specifications and design as well as accessories are subject to change without notice. Screen shots are simulated. Actual products may differ slightly from those illustrated on this promotion material. Please refer to actual samples for final selection. The products displayed on this promotion material may not be available for purchase in your particular country or locality. Please check with your local HANNspree authorized representatives for the availability of specific products in your area. All brand, product, Service names and logos are trademarks and/or registered trademarks of their respective manufactures and Companies.

** IP65: The IP Code classifies how resistant a device is to foreign objects and moisture.
IP65 means that the monitor is protected from total dust ingress and it is protected against low pressure water jets.


* “IPS" word mark / trademark and related patents on technologies belong to their respective owners.

Display Solutions

HANNspree

HO105HTB
10.1” Open Frame Touch Monitor

Experts in Display

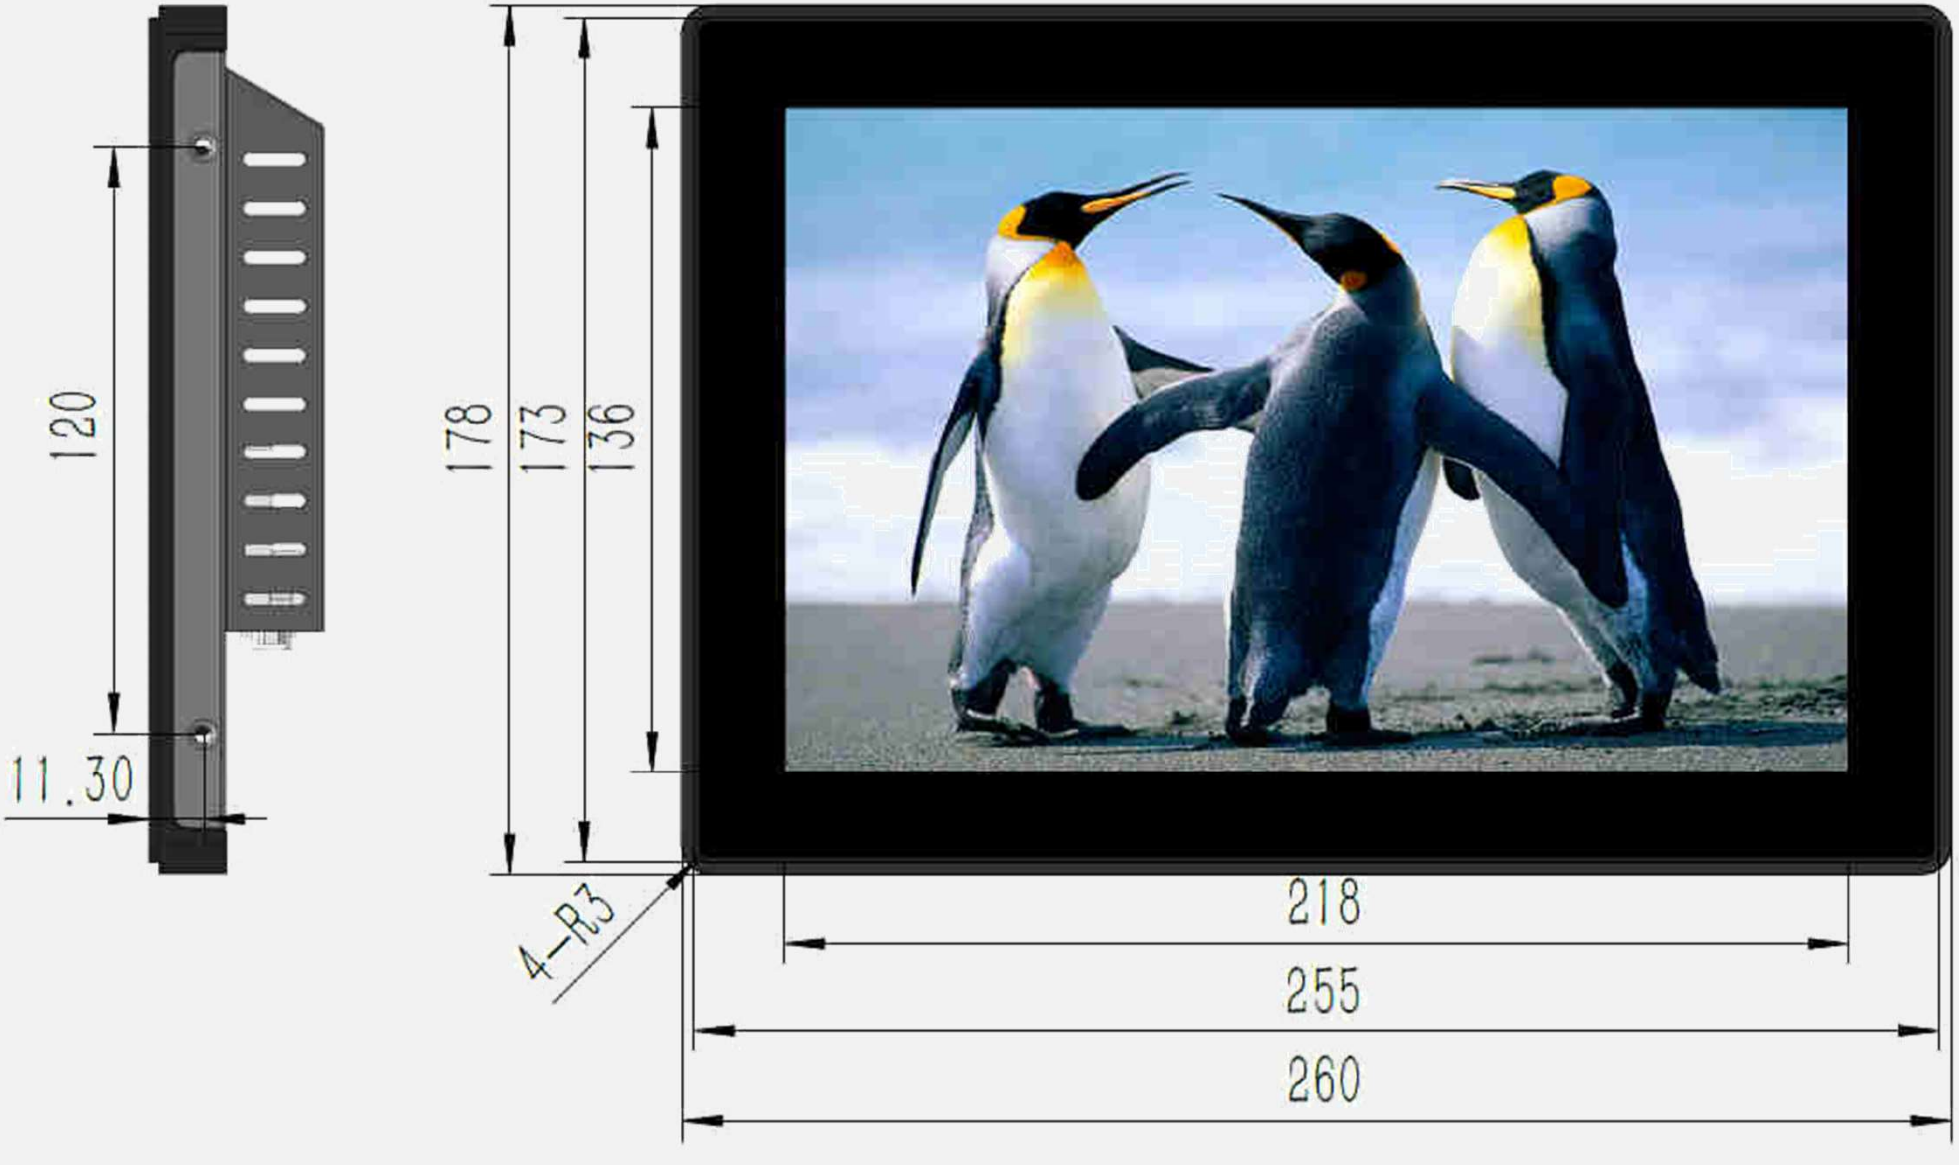

Display Solutions

HANNspree

HO105HTB
10.1” Open Frame Touch Monitor

Experts in Display

