



outVUE
Outdoor TVs

Built for the Outdoors. Backed by Experience.



OutVue

Built for the Outdoors. Backed by Experience.


OutVue is a premium range of true outdoor televisions designed to deliver outstanding performance in environments where standard TVs simply don't last.

Developed by TVD Group, OutVue is backed by over 30 years of AV industry experience supplying, installing, and maintaining displays across pubs, bars, restaurants, hotels, and leisure destinations throughout the UK. We understand the operational realities of hospitality environments from bright outdoor terraces and beer gardens to high-footfall areas exposed to weather, impact, and long daily operating hours.

Our expertise is further strengthened by 10 years of consumer television brand experience through our British TV brand Mitchell & Brown, stocked in over 200 independent retailers nationwide. This unique combination gives us a deep understanding of what customers expect in terms of quality, reliability, performance, and support.


The OutVue range delivers true sun-view visibility with up to 3000 nits brightness, combined with IP66 weatherproofing and IK10 impact protection, ensuring consistent, year-round outdoor performance in demanding commercial settings. Available in 55", 65", and 75" screen sizes, OutVue is designed to enhance outdoor spaces, increase dwell time, and create premium viewing experiences for hospitality customers.



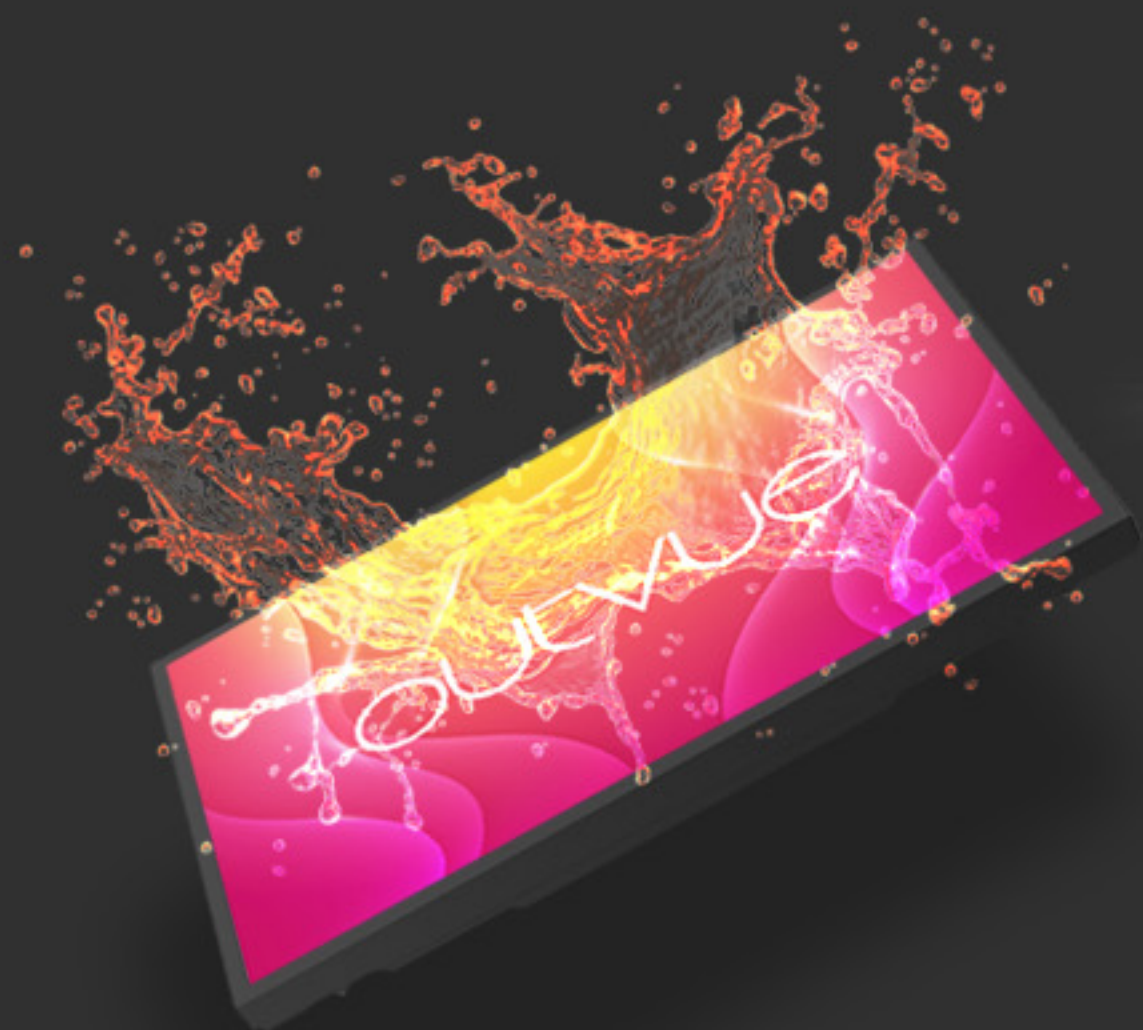

IP66 Rated

Designed for the demands of busy commercial environments, OutVue outdoor TVs feature a superior IP66 ingress protection rating, delivering enhanced resistance to dust and powerful water jets from any direction. Unlike IP55 screens, which are better suited to sheltered areas, OutVue displays are built for fully exposed beer gardens, rooftop terraces and outdoor dining spaces, performing reliably in the UK's unpredictable weather. This higher level of protection reduces maintenance, giving operators complete confidence and long-term peace of mind.

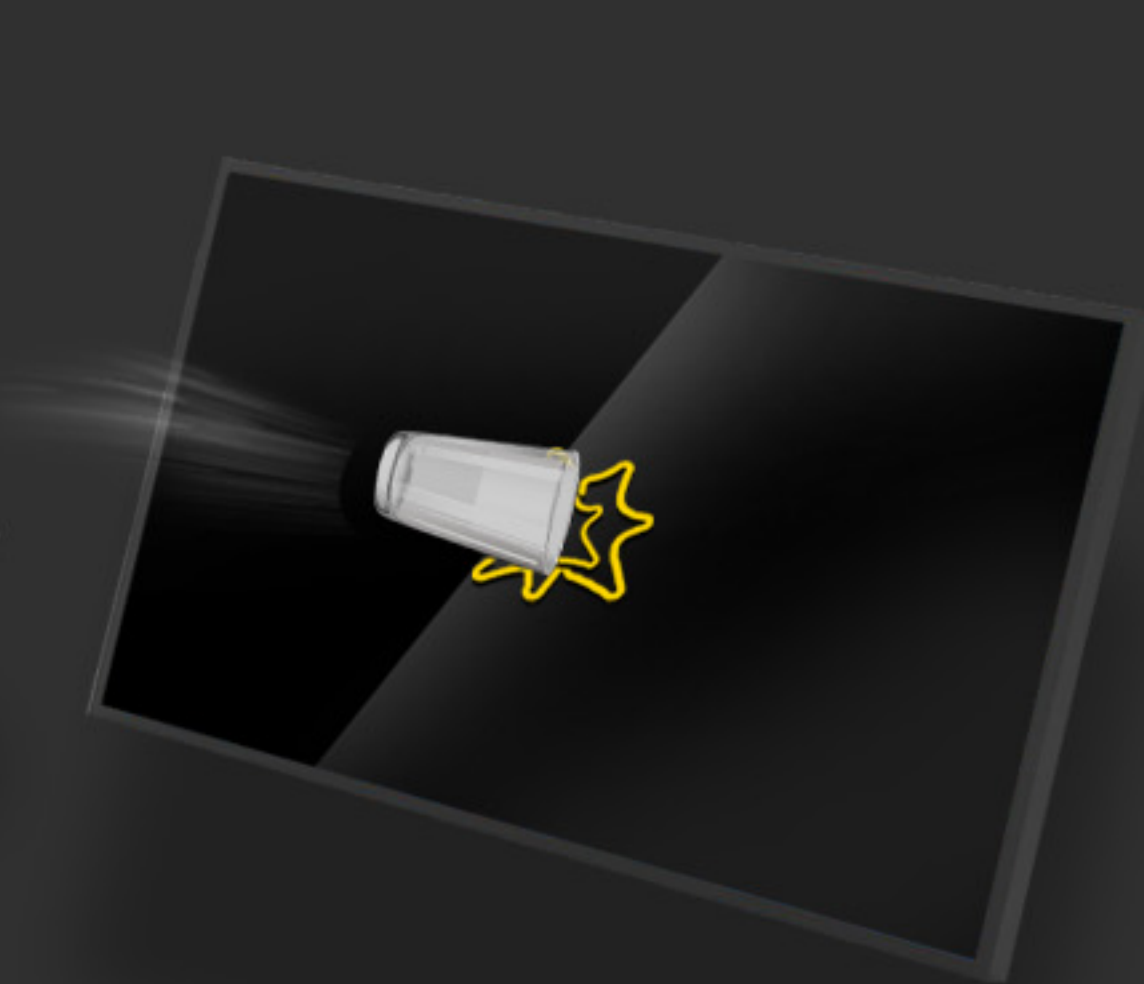

IK10 Protection

OutVue outdoor TVs are engineered for demanding commercial environments, featuring a robust IK10 impact rating - the highest level of protection against mechanical shocks and vandalism. Built with reinforced materials and precision-engineered casing, these screens are designed to withstand accidental knocks, heavy daily use, and the rigours of long-term operation. The durable construction ensures lasting performance and assurance you can trust day after day, giving operators confidence in a reliable, resilient entertainment solution.



3000 Nit Brightness

OutVue outdoor TVs feature an impressive 3000 nits of brightness, delivering outstanding visibility even in direct sunlight. Engineered for commercial environments where clarity is essential, these screens ensure that images remain vivid, sharp, and easy to see regardless of bright outdoor conditions. With such high brightness, your content cuts through glare and ambient light, providing a reliable, eye-catching viewing experience that engages audiences while maintaining long-term performance and durability you can trust.



Ambient Light Sensor

OutVue outdoor TVs feature an Ambient Light Sensor (ALS), which automatically adjusts the screen brightness based on surrounding light levels to ensure the display is always clear and comfortable to view. Key benefits include, Optimises brightness for day and night viewing. Reduces power consumption by lowering brightness when full output is not required. Extends panel lifespan by avoiding continuous maximum brightness operation, ensures consistent readability in changing lighting conditions.

55" OUTDOOR TV



4K UHD RESOLUTION



ULTRA HIGH BRIGHTNESS



IK-10 IMPACT PROTECTION



IP66 WEATHERPROOF RATING



AMBIENT LIGHT SENSOR



ROBUST CONSTRUCTION



ANTI-GLARE TEMPERED GLASS



VESA MOUNTING CAPABILITY

DISPLAY

SPECIFICATION

SCREEN SIZE
MODEL NUMBER
RESOLUTION
ASPECT RATIO
BRIGHTNESS
BACKLIGHT CONFIGURATION
VIEWING ANGLE
OPERATION LIFE CYCLE
OPERATION HOURS
BACKLIGHT ADJUSTMENT
ACTIVE SCREEN AREA
CONTRAST RATIO
RESPONSE TIME
REFRESH RATE

55"
OV55
3840 X 2160 / 4K
16:9
3000 NITS (CD/M²)
DIRECT LED

170/170
50,000 HOURS
24/7
AUTOMATIC AMBIENT LIGHT SENSOR
1210 X 680 MM
1200/1
6.5 MS
60 HZ

POWER

SPECIFICATION

POWER CONSUMPTION
AC INPUT

MAX.600W MIN.190W
100-240V/AC /
50/60HZ

DIMENSIONS & DESIGN

SPECIFICATION

DIMENSIONS (WXHxD)
NET WEIGHT
VESA MOUNTING
ENCLOSURE MATERIAL
COLOUR
FINISHING
GLASS
ORIENTATION

1251W X 722H X 85D MM
50 KG
400 X 400 MM
ALUMINIUM
BLACK
FINE GRAIN POWDER COATING
ANTI-GLARE COATED TEMPERED GLASS
LANDSCAPE OR PORTRAIT

PROTECTION & ENVIRONMENTAL

SPECIFICATION

IP RATING
IMPACT RESISTANCE
OPERATING TEMPERATURE
OPERATING HUMIDITY
COMMERCIAL WARRANTY

IP66 DUST & WATER PROTECTION
IK10 IMPACT RATED
0-55 °C
20% - 80%
1 YEAR

CONNECTIVITY

SPECIFICATION

INPUTS

HDMI X 2 USB X 1



65" OUTDOOR TV



4K UHD RESOLUTION



ULTRA HIGH BRIGHTNESS



IK-10 IMPACT PROTECTION



IP66 WEATHERPROOF RATING



AMBIENT LIGHT SENSOR



ROBUST CONSTRUCTION



ANTI-GLARE TEMPERED GLASS



VESA MOUNTING CAPABILITY



DISPLAY

SCREEN SIZE
MODEL NUMBER
RESOLUTION
ASPECT RATIO
BRIGHTNESS
BACKLIGHT CONFIGURATION
VIEWING ANGLE
OPERATION LIFE CYCLE
OPERATION HOURS
BACKLIGHT ADJUSTMENT
ACTIVE SCREEN AREA
CONTRAST RATIO
RESPONSE TIME
REFRESH RATE

SPECIFICATION

65"
OV65
3840 X 2160 / 4K
16:9
3000 NITS (CD/M²)
DIRECT LED

170/170
50,000 HOURS
24/7
AUTOMATIC AMBIENT LIGHT SENSOR
1429 X 804 MM
1200/1
6.5 MS
60 HZ

POWER

POWER CONSUMPTION
AC INPUT

SPECIFICATION

MAX.600W MIN.190W
100-240V/AC /
50/60HZ

DIMENSIONS & DESIGN

DIMENSIONS (WXHxD)
NET WEIGHT
VESA MOUNTING
ENCLOSURE MATERIAL
COLOUR
FINISHING
GLASS
ORIENTATION

SPECIFICATION

1470W X 845H X 85D MM
65 KG
400 X 400 MM
ALUMINIUM
BLACK
FINE GRAIN POWDER COATING
ANTI-GLARE COATED TEMPERED GLASS
LANDSCAPE OR PORTRAIT

PROTECTION & ENVIRONMENTAL

IP RATING
IMPACT RESISTANCE
OPERATING TEMPERATURE
OPERATING HUMIDITY
COMMERCIAL WARRANTY

SPECIFICATION

IP66 DUST & WATER PROTECTION
IK10 IMPACT RATED
0-55 °C
20% - 80%
1 YEAR

CONNECTIVITY

INPUTS

SPECIFICATION

HDMI X 2 USB X 1

75" OUTDOOR TV



4K UHD RESOLUTION



ULTRA HIGH BRIGHTNESS



IK-10 IMPACT PROTECTION



IP66 WEATHERPROOF RATING



AMBIENT LIGHT SENSOR



ROBUST CONSTRUCTION



ANTI-GLARE TEMPERED GLASS



VESA MOUNTING CAPABILITY



DISPLAY

SCREEN SIZE
MODEL NUMBER
RESOLUTION
ASPECT RATIO
BRIGHTNESS
BACKLIGHT CONFIGURATION
VIEWING ANGLE
OPERATION LIFE CYCLE
OPERATION HOURS
BACKLIGHT ADJUSTMENT
ACTIVE SCREEN AREA
CONTRAST RATIO
RESPONSE TIME
REFRESH RATE

SPECIFICATION

75"
OV75
3840 X 2160 / 4K
16:9
3000 NITS (CD/M²)
DIRECT LED
170/170
50,000 HOURS
24/7
AUTOMATIC AMBIENT LIGHT SENSOR
1651 X 930 MM
1200/1
6.5 MS
60 HZ

POWER

POWER CONSUMPTION
AC INPUT

SPECIFICATION

MAX.660W MIN.190W
100-240V/AC /
50/60HZ

DIMENSIONS & DESIGN

DIMENSIONS (WXHxD)
NET WEIGHT
VESA MOUNTING
ENCLOSURE MATERIAL
COLOUR
FINISHING
GLASS
ORIENTATION

SPECIFICATION

1693W X 971H X 85D MM
85 KG
600 X 600 MM
ALUMINIUM
BLACK
FINE GRAIN POWDER COATING
ANTI-GLARE COATED TEMPERED GLASS
LANDSCAPE OR PORTRAIT

PROTECTION & ENVIRONMENTAL

IP RATING
IMPACT RESISTANCE
OPERATING TEMPERATURE
OPERATING HUMIDITY
COMMERCIAL WARRANTY

SPECIFICATION

IP66 DUST & WATER PROTECTION
IK10 IMPACT RATED
0-55 °C
20% - 80%
1 YEAR

CONNECTIVITY

INPUTS

SPECIFICATION

HDMI X 2 USB X 1