



NovoConnect NC-X710

Streamline workspace communications and collaborations with this versatile 2-in-1 solution

Overview

NovoConnect NC-X710 offers a powerful combination of digital signage (NovoDS) and wireless presentation capabilities, making it an excellent choice for communication and collaboration in corporate environments. The digital signage functionality features a wide range of content options and a highly intuitive Cloud service, making content creation and distribution a breeze, streamlining the process of engaging your audience. The wireless presentation functionality enables 4 users to share content simultaneously, fostering collaborative productivity with features like real-time mirroring, extended desktop functionality, and easy file sharing.





Key Features


Wireless Presentation



- Screen Mirroring: Airplay, Google Cast, & Miracast
- Windows | MacOS | Chromebook | Ubuntu
- Extended desktop
- File & video sharing



NovoConnect software | AirPlay | Google Cast
Screen Mirroring



Extended screen
(serve as the secondary screen to User's laptop)



Primary screen
(User's laptop)
Extended Desktop

Digital Signage



- Built-in NovoDS software easy to deliver the content
- Organize digital signage content through Novo DS Cloud and NovoDS Studio
- Dynamic content type: YouTube, Instagram, Google drive
- Cloud-based content management: two-factor authentication



BYOM



BYOM (Bring Your Own Meeting) allows users to seamlessly connect their devices to in-room AV equipment (such as camera) via Wi-Fi, making meetings and presentations more convenient and productive.




Cloud-based Device Management



- Managing devices by groups
- Firmware update
- Remote assist – view and click on the device screen in the cloud



Cloud-based device management

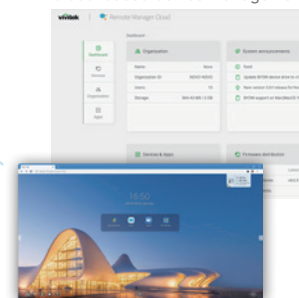


Dashboard, Device snapshot & Remote control

NT Live



- Broadcast its screen content (as an “NT Live” source) to other display devices
- Receive screen broadcast from an “NT Live” source, such as a NovoTouch panel

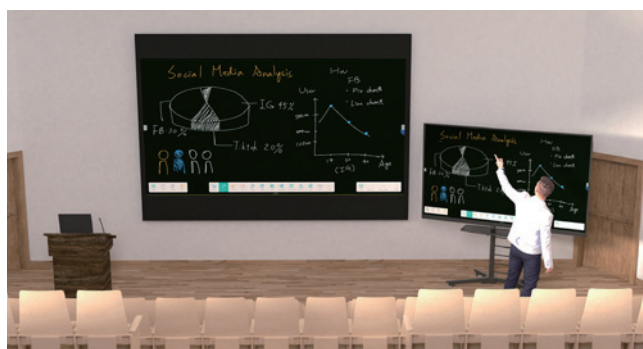

System Integration



The SysControl network-based control protocol allows NovoConnect devices to be integrated with third-party control systems, enabling remote management and control of device functions, including power on/off, volume adjustment, and more.



Product Specifications-Hardware

Model	NC-X710
Storage	Internal: 32GB
	External: microSD Card (Up to 32GB), USB Drive (Up to 32GB)
Display Output	HDMI-Out v2.0 (HDCP v2.2 Compliant)
Display Resolution	3840 x 2160 (16:9, UHD 4K@60fps)
Display Orientation	Landscape & Portrait
Ethernet	RJ45 (10/100/1000 Mbps)
Wi-Fi	Wi-Fi: 802.11 b/g/n/ac (2.4GHz & 5GHz), 2T2R
Input Connection Ports	USB(x3)
	microSD Slot
HDMI-In	Yes
Audio Output	Audio-Out (3.5mm)
Dimensions (WxDxH)	96 x 178 x 28mm (3.8' x 7.0' x 1.10')
Weight	490g (17.3oz)
Power Supply	DC jack: 5V/2A, 10W

Product Specifications-Software

Software		NC-X710
OS supported	Windows	Window 10+
	MacOS	MacOS 11+
	Android	Android 11+
	iOS	iOS 14+
	Chrome Book	0
Connection Method	Desktop Software	Windows & Mac
	Android/iOS App	Android/iOS
	Airplay	0
	GoogleCast	0
	Miracast	Windows 10+
Management Tool	Desktop Software	Windows
	Cloud Service	0
Build-in Apps	Google Play Store	0
	NT Live Screen	0
	NT Live Receiver	0



Visit www.vivitekcorp.com for more product info
Copyright (c) 2024 Delta Electronics, Inc. All Rights Reserved

A brand of  **DELTA**