

# ViewSonic<sup>®</sup> LCD DISPLAY VG3419C-2


## Key Features

- 21:9 ultra-wide screen with UWQHD 3440 x 1440 resolution
- Integrated Docking Station with Ethernet, and delivers up to 96W charging via USB-C connection
- 1500R Curved Panel
- 120Hz Refresh rate delivers fluid visuals
- Advanced ergonomics with swivel, height adjustment and a -5°~20° tilt angle



## Product Description

The VG3419C-2 is a 34" ultra-wide curved docking monitor with UWQHD 3440 x 1440 resolution. Its 21:9 aspect ratio and 1500R curvature provide an immersive viewing experience. Offering USB-C and Ethernet connectivity, this curved docking monitor dubs as a complete hub for charging, data, network, and peripherals, effectively reducing cable clutter and simplifying cable management. With ergonomic flexibility, you can tilt and adjust the height of the VG3419C-2 to have a smooth workflow as a professional multitasker. Thought for multi-tasking and productivity, the VG3419C-2 comes with a built-in KVM switch function to connect and control multiple systems.

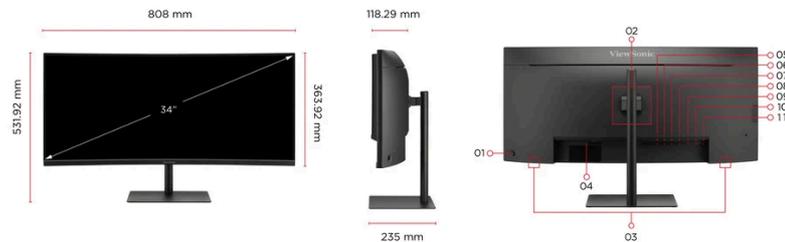

- |   |                               |
|---|-------------------------------|
| 1. Joystick Key                             | 7. USB Type C                 |
| 2. VESA Compatible(Wall Mount 100 x 100 mm) | 8. USB Type B 3.2 Downstream  |
| 3. Speakers                                 | 9. Ethernet (RJ45)            |
| 4. Power In                                 | 10. USB Type A 3.2 DownStream |
| 5. HDMI                                     | 11. Audio Out                 |
| 6. DisplayPort                              |                               |

Visit Us [www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

Display Size (in.):	34
Viewable Area (in.):	34
Panel Type:	VA Technology
Resolution:	3440 x 1440
Resolution Type:	UWQHD (UltraWide QHD)
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	300 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	21:9
Response Time (Typical GTG):	3.5ms
Response Time (GTG w/OD):	3.5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	1500R
Refresh Rate (Hz):	120
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 75% size (Typ) sRGB: 105% size (Typ)
Pixel Size:	0.232 mm (H) x 0.232 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

**COMPATIBILITY**

PC Resolution (max):	3440x1440
Mac® Resolution (max):	3440x1440
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	3440x1440

**CONNECTOR**

USB 3.2 Type A Down Stream:	2
USB 3.2 Type B Up Stream:	1
USB 3.2 Type C Up Stream; DisplayPort Alt mode :	1 (96W power charger)
3.5mm Audio Out:	1
HDMI 2.0:	1
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)
Ethernet LAN (RJ45):	1

**AUDIO**

Internal Speakers:	2Watts x2
--------------------	-----------

**POWER**

Eco Mode (Conserve):	23.8W
Eco Mode (optimized):	27.9W
Consumption (typical):	32.2W
Consumption (max):	41W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

**ADDITIONAL HARDWARE**

Kensington Lock Slot:	1
Cable Organization:	Yes

**CONTROLS**

Physical Controls:	U, R, D, L, EN (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

**OPERATING CONDITIONS**

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

**WALL MOUNT**

VESA Compatible:	100 x 100 mm
------------------	--------------

**INPUT SIGNAL**

Frequency Horizontal:	HDMI (v2.0): 30 ~ 160KHz, DisplayPort (v1.4): 30 ~ 185KHz, Type C: 30 ~ 185KHz
Frequency Vertical:	HDMI (v2.0): 24 ~ 120Hz, DisplayPort (v1.4): 24 ~ 120Hz, Type C: 24 ~ 120Hz

**VIDEO INPUT**

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4), Micro-Packet - Type C
---------------	---

**ERGONOMICS**

Height Adjust (mm):	150
Swivel:	90°
Tilt (Forward/Back):	-5° / 20°

**WEIGHT (IMPERIAL)**

Net (lbs):	17.4
Net Without Stand (lbs):	13.1
Gross (lbs):	22.9

**WEIGHT (METRIC)**

Net (kg):	7.9
Net Without Stand (kg):	6
Gross (kg):	10.4

**DIMENSIONS (IMPERIAL) (WXHxD)**

Packaging (in.):	39.1 x 19.5 x 6.7
Physical (in.):	31.81 x 15.03~20.94 x 9.25
Physical Without Stand (in.):	31.81 x 14.33 x 4.66

**DIMENSIONS (METRIC) (WXHxD)**

Packaging (mm):	993 x 495 x 170
Physical (mm):	808 x 381.92~531.92 x 235
Physical Without Stand (mm):	808 x 363.92 x 118.29

**GENERAL**

Regulations:	Energy Star, EPEAT, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 10.0, EAC, UkrSEPRO, RCM
PACKAGE CONTENTS:	VG3419C-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v2.0; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards, EPEAT