



Key Features


HIGHER BRIGHTNESS. LONGER LAMP LIFE.

- 22,000:1 contrast ratio
- SuperColor™ technology
- 5 colour modes
- Auto power off
- Vertical keystone



Product Description

The ViewSonic PA503W offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503W projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColour™ technology offers a wider range of displayable colour ensuring true-to-life colour accuracy in both bright and dark environments without sacrificing image quality.

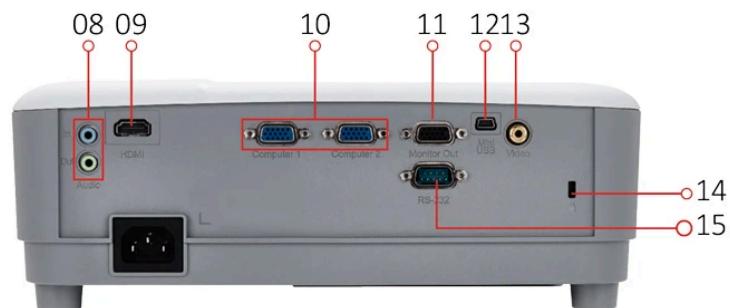

1. Keypad
2. LED indicator
3. Lamp cover
4. Security lock

8. Audio in/out
9. HDMI
10. Dual VGA
11. VGA out

15. RS232

5. Zoom/Focus
6. Front IR
7. Projection Lens

12. Mini USB
13. Video
14. Kensington® Lock Slot

Visit Us

www.viewsonic.com

SPECIFICATION		OTHERS	
Projection System:	0.65" WXGA	Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Native Resolution:	1280x800	Power Consumption:	Normal: 260W Standby: <0.5W
Brightness:	4000 (ANSI Lumens)	Operating Temperature:	0~40°C
Contrast Ratio with SuperEco Mode:	22000:1	Carton:	Brown
Display Color:	1.07 Billion Colors	Net Weight:	2.2kg
Light Source Type:	200W UHP Lamp	Gross Weight:	3.24kg
Light Source Life (hours) with Normal Mode:	6000	Dimensions (WxDxH) with Adjustment Foot:	294x218x110mm
Light Source Life (hours) with SuperEco Mode:	15000	Packing Dimensions:	365x300x188mm
Lens:	F=2.56-2.68, f=22-24.1mm	OSD Language:	
Projection Offset:	100%+/-5%	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Hindi, Arabic, Vietnamese, Total 22 languages	
Throw Ratio:	1.55-1.70	User Guide Language:	
Optical Zoom:	1.1x	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages	
Digital Zoom:	0.8x-2.0x		
Image Size:	30"-300"		
Throw Distance:	1m-10.98m (100"@3.34m)		
Keystone:	+/- 40° (V)		
Audible Noise (Normal):	31dB	STANDARD ACCESSORY	
Audible Noise (Eco):	27dB	Power Cord:	1
Input Lag:	16ms	VGA Cable:	1
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)	Remote Control:	1
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	QSG:	Yes
Video Compatibility:	NTSC, PAL, SECAM	Air Filter:	Yes (CN Only)
Horizontal Frequency:	15K-102KHz	Warranty Card:	Yes (CN Only)
Vertical Scan Rate:	23-120Hz	OPTIONAL ACCESSORY	
INPUT		Lamp/Light Source:	RLC-109
Computer in (share with component):	2	Air Filter:	RSPL
Composite:	1	Wall/Ceiling Mount:	PJ-WMK-007
HDMI:	1 (HDMI 1.4/ HDCP 1.4)	Carry Bag:	PJ-CASE-008
Audio-in (3.5mm):	1		
OUTPUT			
Monitor out:	1		
Audio-out (3.5mm):	1		
Speaker:	2W		
CONTROL			
RS232 (DB 9-pin male):	1		
USB Type Mini B (Services):	1		